


從短尺寸到加長尺寸，規格豐富的系列產品，為各種高精度加工提供強力支援。

外部噴灑冷卻



非BIG-PLUS (兩面接觸) 式

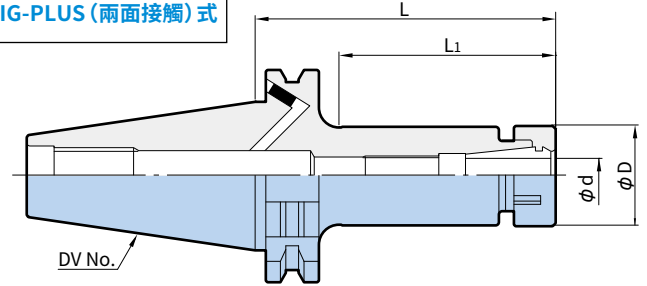

DV 刀柄規格	夾持徑 φd	φD	L	L ₁	套筒型式	螺帽型式	重量 (kg)
DV40-NBS 6- 60	0.25~ 6	20	60	34	NBC 6-□	NBN 6	0.9
- 90			90	60			1.0
-135			135	105			1.0
-NBS 8- 60	0.5 ~ 8	25	60	34	NBC 8-□	NBN 8	0.9
- 90			90	62			1.0
-135			135	107			1.2
-NBS10- 60	1.5 ~10	30	60	34	NBC10-□	NBN10	1.0
- 90			90	64			1.1
-135			135	104			1.4
-NBS13- 60	2.5 ~13	35	60	37	NBC13-□	NBN13	1.0
- 90			90	66			1.2
-135			135	106			1.6
-NBS16- 60	2.5 ~16	42	60	38	NBC16-□	NBN16	1.1
- 90			90	68			1.4
-135			135	113			1.8
-NBS20- 60	2.5 ~20	46	60	40	NBC20-□	NBN20	1.3
- 90			90	70			1.6
-135			135	115			2.0
-165			165	145			2.3
-200			200	180			2.6

1. 附帶螺帽，但軸向調整螺絲、套筒、扳手敬請另外選購。
2. 本體具備貫通孔，可選擇使用中心出水或機台端面出水。

3. 重量是包含螺帽的但不含套筒。

附屬品		附屬品			
NBN 標準螺帽  如需購買備用品  G26	NBK 扳手   G27	套筒   G4	BPS 高壓止水螺帽   G24	軸向調整螺絲   G10	絲攻調整螺絲   G26

夾持徑：φ0.25 ~ φ20

NEW BABY CHUCK **高精度彈性套筒夾頭** PAT.

DV 刀柄規格	夾持徑 φ d	φ D	L	L ₁	套筒型式	螺帽型式	重量 (kg)
DV50-NBS 6-120	0.25~ 6	20	120	85	NBC 6-□	NBN 6	2.8
-165			165	125			3.1
-NBS 8-120	0.5 ~ 8	25	120	80	NBC 8-□	NBN 8	2.9
-165			165	130			3.0
-NBS10- 90	1.5 ~10	30	90	60	NBC10-□	NBN10	2.9
-120			120	85			3.0
-165			165	130			3.2
-NBS13- 90	2.5 ~13	35	90	60	NBC13-□	NBN13	3.0
-120			120	80			3.4
-165			165	125			3.7
-NBS16- 90	2.5 ~16	42	90	60	NBC16-□	NBN16	3.1
-120			120	85			3.9
-165			165	130			4.3
-200			200	165			4.6
-NBS20- 75	2.5 ~20	46	75	45	NBC20-□	NBN20	3.1
- 90			90	60			3.2
-120			120	85			4.0
-165			165	130			4.5
-200			200	165			4.8

1. 附帶螺帽，但軸向調整螺絲、套筒、扳手敬請另外選購。
2. 本體具備貫通孔，可選擇使用中心出水或機台端面出水。

3. 重量是包含螺帽的但不含套筒。